



COMMERCIAL CLEANING EQUIPMENT



NACECARE™
SOLUTIONS

Clarity in Cleaning

DRY VACUUMS

NaceCare dry vacuums have powerful 1.5 and 1.6 Hp vacuum motors (complete with 3 year warranties) and provide 106"/110" of lift plus 114 CFM of airflow for excellent soil recovery and longer carpet life. When equipped with a Hepa flo bag, our standard filtration is 0.5 micron at 99% efficiency. For those environments demanding even more we have an optional Microtex filter which provides Hepa like filtration of 0.3 micron at 99.75% efficiency. These machines are built to withstand commercial use and are equipped with a thermal overload for long-term motor protection and operator safety.

The NVH machines have weight saving poly formed heads. The open top allows for storage of accessory tools and power cord while the NVH 380C comes complete with a cage allowing for onboard hose and wand storage.

2
NACECARE SOLUTIONS



NVH 200



NVH 380



NVH 380C

MODEL	NVH 200	NVH 380	NVH 380C
-------	---------	---------	----------

MOTOR	1,100 W, 1.5 Hp 1 stage, 1 speed	1,200 W, 1.6 Hp 2 stage, 1 speed	1,200 W, 1.6 Hp 2 stage, 1 speed
AIRFLOW	114 cfm	114 cfm	114 cfm
WATERLIFT	106"	110"	110"
CAPACITY	2.5 gal.	4.5 gal.	4.5 gal.
POWER CORD	33'	33'	33'
SOUND LEVEL	62 dB(A)	62 dB(A)	62 dB(A)
STANDARD FILTRATION - TRITEX	0.5 micron 99% eff.	0.5 micron 99% eff.	0.5 micron 99% eff.
FILTRATION OPTION MICROTEX	0.3 micron - HEPA-like 99.75% eff.	0.3 micron - HEPA-like 99.75% eff.	0.3 micron - HEPA-like 99.75% eff.
WEIGHT	11 lbs.	15 lbs.	15.5 lbs.



Q U I E T Q S E R I E S TM V A C U U M S

The Henry and NVQ 380 are both two speed machines. Running at 49 dB(A) on the High setting and 47 db(A) on Low, they are excellent for daytime cleaning or cleaning noise sensitive areas.

The NVQ has a galvanized steel head and comes complete with a blower feature.

Henry has the added feature of a manual crank rewind for power cord storage and protection.

The 380 series vacuums are the machines of choice for commercial cleaning. Their structural foam tanks are covered by a 10 year warranty and their four swivel castors provide excellent trailing capability.



NVQ 380



NRV 200

MODEL

NVQ 380

NRV 200

MODEL	NVQ 380	NRV 200
MOTOR	1,200 W, 1.6 Hp 2 stage, 2 speed	1,200 W, 1.6 Hp 2 stage, 2 speed
AIRFLOW	114 cfm	114 cfm
WATERLIFT	110"	110"
CAPACITY	4.5 gal.	2.5 gal.
POWER CORD	33'	33'
SOUND LEVEL	47/49 dB(A)	47/49 dB(A)
STANDARD FILTRATION - TRITEX	0.5 micron 99% eff.	0.5 micron 99% eff.
FILTRATION OPTION MICROTEX	0.3 micron - HEPA-like 99.75% eff.	0.3 micron - HEPA-like 99.75% eff.
WEIGHT	18 lbs.	13 lbs.



BACKPACK VACUUMS

Our backpack vacuums let you cover a lot of ground with superb vacuuming efficiency. The back support, waist and shoulder straps have been designed to minimize operator fatigue, and the hoses feature swivel fittings to ensure tangle-free operation. At only 10.8 pounds, the RSV 130 is among the lightest full size backpacks on the market. However, it's extremely powerful for its size, because our 1.6 Hp motor, (3 year warranty) provides 115" of lift and 114 cfm of airflow. They are equipped with a standard 4 stage filtration system and both can be used with or without a bag. When equipped with a Hepa flo bag our standard filtration is 0.5 micron at 99% efficiency. For those environments demanding even more we have an optional Microtex filter which provides Hepa like filtration of 0.3 micron at 99.75% efficiency. For operator safety, the machines are fitted with a thermal protection device.

4
NACECARE SOLUTIONS



RSV 130



RSV 200

MODEL

RSV 130

RSV 200

MOTOR	1,200W, 1.6 Hp, 1 stage	1,200W, 1.6 Hp, 1 stage
AIRFLOW	114 cfm	114 cfm
WATERLIFT	115"	115"
CAPACITY	1.5 gal.	2.5 gal.
STANDARD FILTRATION - TRITEX	0.5 micron 99% eff.	0.5 micron 99% eff.
FILTRATION OPTION MICROTEX	0.3 micron - HEPA-like 99.75% eff.	0.3 micron - HEPA-like 99.75% eff.
WEIGHT	10.8 lbs.	12 lbs.
POWER CORD	42'	42'
SOUND LEVEL	65 dB(A)	65 dB(A)
TANK CONSTRUCTION	polypropylene	polypropylene



WET/DRY VACUUMS

The WV 370 and WV 570 shown on this page have a handy carrying handle for dumping. They also utilize polypropylene tanks for maximum durability and mobility, and the 570 hosts a structural foam tank with swivel castors for excellent mobility. It comes complete with a 10 year warranty.

All our wet/dry vacuums feature a 1.3 Hp bypass motor with a 2 year warranty and provide 100" of lift plus 95 CFM of airflow for excellent dry soil or water recovery.

Each comes standard with our ball float wet shut-off assembly that rotates continuously, staying clean and ensuring water does not reach the motor. Their excellent 0.5 micron filtration results in over 99% efficiency for improved indoor air quality and can be used with or without a bag. Vapor barriers can be added to the 570/900/1800 to eliminate moisture completely.



MODEL

WV 470

WV 570

WV 370

MODEL	WV 470	WV 570	WV 370
MOTOR	1,000W, 1.3 Hp	1,000W, 1.3 Hp	1,000W, 1.3 Hp
AIRFLOW	95 cfm	95 cfm	95 cfm
WATERLIFT	100"	100"	100"
CAPACITY	7 gal.	6 gal.	4 gal.
FILTRATION	0.5 micron	0.5 micron	0.5 micron
WEIGHT	22 lbs.	34 lbs.	19 lbs.
POWER CORD	42'	42'	42'
SOUND LEVEL	61 dB(A)	64 dB(A)	61 dB(A)
TANK CONSTRUCTION	polypropylene	structural Foam	polypropylene

WET/DRY VACUUMS

The structural foam head of both the 900 and the 1800 series is made from rustproof and durable materials. Both the foam head and the tanks come complete with a 10 year warranty. The Dump Tube permits quick and convenient emptying to a floor drain. And our unique tip and pour system on the 900 series allows the tank to be emptied even when a floor drain is not present. For wide area cleaning, a 29" front mounted squeegee kit can be fitted.

6
NACECARE SOLUTIONS



The unique tip and pour system allows the tank to be emptied even in the absence of a floor drain.

WV 900 WVD 902

MODEL


WV 900

WVD 902

MODEL	WV 900	WVD 902
MOTOR	1,000W, 1.3 Hp	2 - 1,000W, 1.3 Hp
AIRFLOW	95 cfm	180 cfm
WATERLIFT	100"	100"
CAPACITY	12 gal.	12 gal.
POWER CORD	42'	42'
WEIGHT	44 lbs.	49 lbs.
SOUND LEVEL	64 dB(A)	67 dB(A)
CONSTRUCTION	structural foam	structural foam

1800 SERIES WET VACUUMS

The new 1800 series wet vacuums deliver dependable power and performance in a rugged unit. Structural foam is used to manufacture the powerhead and one-piece body. The DH models have a large diameter dump hose for fast draining. The P model incorporates a sump pump, which enables continuous pumping of fluid without interrupting the vacuuming process.

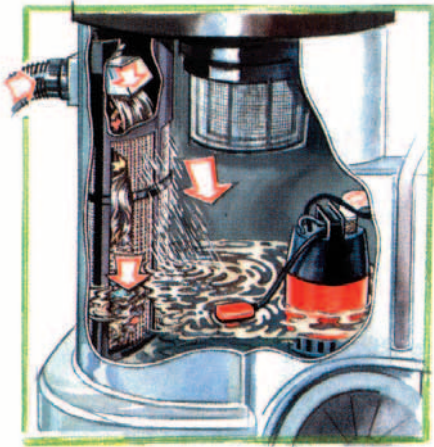

Continuous Pumper

The WVD 1802P enables continuous pumping of liquids during the vacuuming process. So, it is ideal for floods, water pipe ruptures, drain back-ups, and industrial spills. The submersible pump is made of durable, stainless steel for heat and chemical resistance. The motor uses a stainless steel shaft and triple seal system and has a thermal protection device to prevent overheating.

Pump Motor:	500 W, 0.75 Hp
Max. Flow:	60 gpm
Max. Temp.:	100° F
Type:	centrifugal, float activated



WVD 1802P

WV 1800DH/ WVD 1802DH

MODEL	WVD 1802P	WV 1800DH	WVD 1802DH
MOTOR(S)	2 - 1,000W, 1.3 Hp	1,000W, 1.3 Hp	2 - 1,000W, 1.3 Hp
AIRFLOW	180 cfm	95 cfm	180 cfm
WATERLIFT	100"	100"	100"
CAPACITY - WET	20 gal.	20 gal.	20 gal.
POWER CORD	42'	42'	42'
WEIGHT	86 lbs.	62 lbs.	67 lbs.
TANK	structural foam	structural foam	structural foam
HEAD	structural foam	structural foam	structural foam
PUMP POWER	500 W		
OUTPUT	60 gpm		
TYPE	centrifugal		

HEPA VACUUMS

The H Series HEPA vacuums' mighty 1.6 Hp vacuum motor comes with a 3 year warranty and provides 110" of lift and 114 CFM of airflow for excellent soil recovery. The high efficiency HEPA filter is serialized and protected in its own steel module, providing a minimum 99.97% filtration at 0.3 microns. Every machine is sodium flame tested to ensure they meet or exceed the hazardous vacuum standard BS 5415.

NVQ 372H has a polypropylene tank for maximum durability and mobility while the 900 has a structural foam tank that comes complete with a 10 year warranty.

The 372 features a two-speed head, which offers ultra quiet operation at 49 dB(A) on high and 47 dB(A) on low, while the 900 comes with a durable structural foam head.

8
NACECARE SOLUTIONS



NVQ 372H



NVQ 900H

MODEL

NVQ 372H

NVQ 900H

MOTOR	1,200W, 1.6 Hp 2 stage, 2 speed	1,200W, 1.6 Hp 2 stage
AIRFLOW	114 cfm	114 cfm
WATERLIFT	110"	110"
CAPACITY	4.5 gal.	12 gal.
POWER CORD	30'	42'
SOUND LEVEL	47/49 dB(A)	61 dB(A)
WEIGHT	20 lbs.	49 lbs.
STANDARD FILTRATION	2 stage paper bag 0.5 micron Tritex 0.3 micron at 99.997%	1 stage paper bag 0.5 micron Tritex 0.3 micron at 99.997%

VAPOUR CLEANING

The JS 1600C incorporates stainless steel welded boilers ensuring consistent steam pressure. The cleaning power of steam attacks grease, grime, hard water deposits and mold leaving the surface sanitized. The pump is connected to the water reservoir for a constant supply of water and unlimited working capacity.

Operator safety is assured by the many safety features including 12V steam controls, pressure switch, thermostat, high limit thermal shut off and pressure relief valve.

With its consistent and continuous flow of steam the JS 1600C is an excellent choice for cleaning grouted floors, showers, kitchens and any area where detail cleaning is a challenge.

In industrial kitchens it is very effective in all food preparation and processing areas, on stainless steel range hoods and on other equipment. It is also excellent in hotel rooms for spotting draperies, bed spreads, and carpets.

It will even kill dust mites on a hotel mattress.



Jet Steam 1600C in CR 40025 cart



Jet Steam 1600C

MODEL

Jet Steam 1600C

BOILER SIZE	1.25 quarts
BOILER CAPACITY	unlimited
WATER RESERVOIR	4 quarts
HEATING POWER	1,500 W
STEAM PRESSURE	65 psi
STEAM TEMPERATURE	240°F
POWER CORD	8 ft
WEIGHT	12 lbs
TOTAL POWER	1,500 W, 120V

CYLINDRICAL BRUSH SCRUBBER WITH OPTIONAL ESCALATOR KIT

Clean virtually any floor surface. Everything from escalators to carpets, hardwood, profiled ceramics, grouted tile and rubberized floors - including uneven floors, all are no issue for the DP420 Duplex.

Begin by installing the "escalator kit" - switch the brushes, tanks, top and add a patented wheel guide for the escalator version. With the escalator running towards the operator, hook a dry vac to the unit, drop the handle and commence dry cleaning. After a couple of rotations of the full tread, switch off the vacuum, remove the hose and begin damp cleaning by squeezing the trigger to release the solution. Not much water is needed to effectively do the job. From here you have a choice: leave your unit as an escalator cleaner or set it back up for any floor or carpet surface you need to clean - you decide.

10
MAINTENANCE SOLUTIONS



Optional escalator kit for the DP 420

DP 420



Escalator kit in action

MODEL

DP 420

CLEANING PATH	14"
SOLUTION TANK	1.6 gal.
RECOVERY TANK	1 gal.
BRUSH SPEED	780 rpm
BRUSH PRESSURE (max)	70 lbs.
BRUSH MOTOR	1000w / 1.3hp
VACUUM MOTOR	NA
POWER CORD	35 ft.
WEIGHT	57 lbs.

S W E E P E R S - S T 5 0 / 6 0

The ST 50BT and ST 60BT are excellent sweepers on both carpet and hard surfaces, both indoors and out. Their 26" and 34" cleaning paths, coupled with 11 and 17 gallon hoppers, respectively, enable them to tackle even the largest jobs, while their compact size makes them effective in confined areas.

With a speed of 3.6 ft. and 4.1 ft./sec., respectively, both units can sweep upwards of 25,000 sq.ft. per hour. The ST 60BT has many operating options, including: forward drive with brushes on, reverse drive with brushes on, forward/reverse with brushes off for transport, idle with brushes on or off.

Their one-piece roto molded polyethelene body and steel frame makes them rugged but their non-marking wheels and skirt make them gentle on your floors.



ST 50BT



ST 60BT

Optional Battery Feature

100% sealed batteries, sealed, spill-proof and maintenance-free requiring only recharging. No hydrogen off-gassing when recharging and explosion-proof - making for the safest battery available anywhere.

MODEL

ST 50BT

ST 60BT

MODEL	ST 50BT	ST 60BT
CLEANING PATH	26"	34"
CAPACITY	11 gallons	17 gallons
MAIN BROOM WIDTH	20"	24"
SIDE BROOM DIA.	12"	16"
RUN TIME	4 hrs.	2-3 hrs.
MOTOR: Central & Side	600W / 0.75 Hp	600W / 0.75 Hp
MOTOR: Traction		250W / 0.33 Hp
BATTERIES: Wet	2 @ 6V, 244 AH (Trojan T-125)	2 @ 12V, 140 AH
BATTERIES: Sealed	2 @ 6V, 225 AH	(see NaceCare for details)

SPECIALTY PRODUCT

At 1,200 PSI and with a flow rate of 2.1 gpm, the K 1120T has all the power you need. Each unit comes complete with a Dirt Killer nozzle and a Vario nozzle for adjustment of the spray fan. The triplex piston pump incorporates stainless steel ceramic coated pistons to reduce friction - ensuring years of heavy duty, commercial use. All valves are stainless steel and the seal kit includes Teflon graphite rings to provide dry running safely without pump damage.

12
NACECARE SOLUTIONS



K-1120T

MODEL **K-1120T**

PUMP	Brass
PRESSURE	1,200 psi
MOTOR	110-120 V, 1.5 Hp, 13.0 amps
VOLUME	2.1 gpm
MAX. TEMPERATURE	140° F
POWER CORD	23', 14/3
WEIGHT	57 lbs.
PRESSURE HOSE	50'
INCLUDES	gun with lance, vario nozzle, dirt killer nozzle

NaceCare Solutions
1205 Britannia Road East
Mississauga, Ontario
Canada L4W 1C7



Telephone: **905-795-0122**
Toll Free: **1-800-387-3210**
Toll Free Fax: **1-800-709-2896**
E-Mail: **info@nacecare.com**
Website: **www.nacecare.com**